
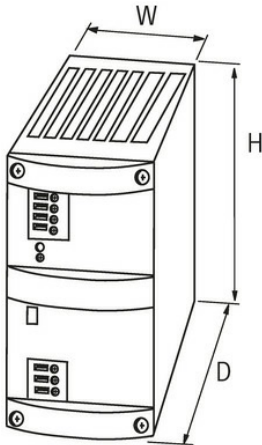


MCS POWER SUPPLY 1-PHASE,  
IN: 90-265VAC OUT: 24-28V/10ADC

INPUT: 90...265 V AC  
OUTPUT: 24...28 V DC  
Current: 10 A

Link to Product

Illustration

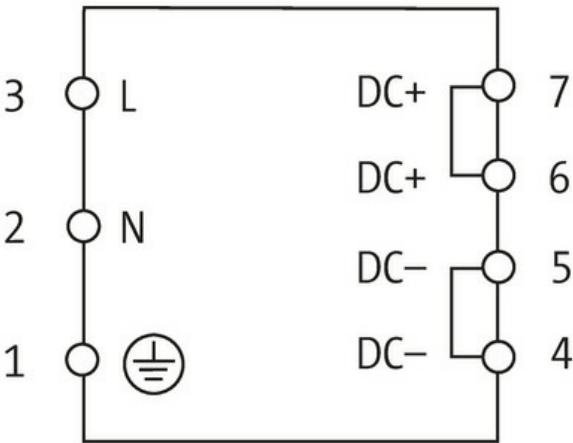

Product may differ from Image



General data	
Standards	IEC 61010-2-201, EN 61204-3, EN 55022 B, EN 61000-3-2
Mounting method	DIN-rail mountable TH35 (EN 60715)
Temperature range	0...+60 °C (storage temperature -25...+85 °C)
Relative humidity	5...95%, no condensation
Efficiency	88% (115 V AC); 90% (230 V AC)
Dimensions H×W×D	127×68×204 mm
Output	

Output voltage	24 V DC (SELV), $\pm 1\%$ ; 24...28 V adjustable
LED display	LED (green) for output voltage
Selectable switch-off mode	front sided plug link (automatic re-start or definite shut-off)
Output current	10 A (+60 °C, 90...265 V AC); 12 A (+40 °C, 110...265 V AC)
Mains failure bridging time	max. 13 A (230 V AC)
Ripple	max. 20 mV eff/rms
Spikes	max. 200 mV ss/pp
Unit protection	short-circuit and overload protected
Parallel usage/serial usage	max. 5 units/max. 2 units

#### Input

Input voltage	90...265 V AC/90...250 V DC
Primary fusing external	max. 10 A
Input current	2.7 A (100 V AC); 1.1 A (230 V AC)
Inrush current after 1 ms	max. 25 A
Frequency	50...60 Hz

#### Commercial data

country of origin	CZ
customs tariff number	85044090
EAN	4048879080668
eClass	27049002
Packaging unit	1.000