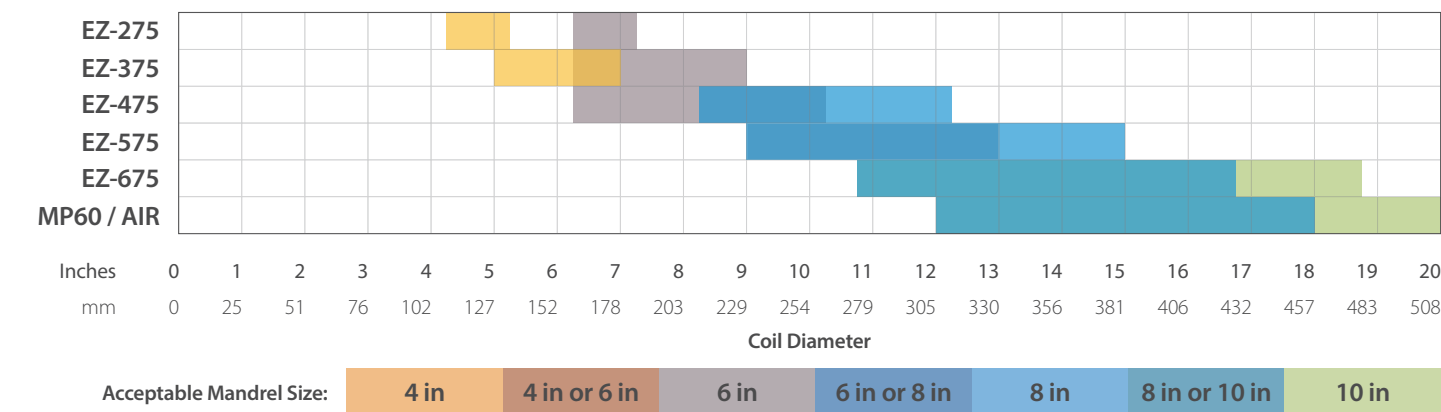





REELEX Payout Tube Size Guide - Minimum and Maximum Coil Sizes

Tube	Min/Max Coil Size Range with Mandrel Sizes: 4 6 8 10	Overall Tube Length	Minimum Acceptable Coil Diameter	Minimum Recommended Mandrel Diameter	Coil Wall Thickness at Minimum	Maximum Acceptable Coil Diameter	Maximum Recommended Mandrel Diameter	Coil Wall Thickness at Maximum
EZ-275		2 in 51 mm	4.25 in 108 mm	4 in 101 mm	0.13 in 3 mm	7.25 in 184 mm	6 in 152 mm	0.63 in 16 mm
EZ-375		3 in 76 mm	5.00 in 127 mm	4 in 101 mm	0.50 in 13 mm	9.00 in 229 mm	6 in 152 mm	1.50 in 38 mm
EZ-475		4 in 101 mm	6.25 in 159 mm	6 in 152 mm	0.13 in 3 mm	12.25 in 311 mm	8 in 203 mm	2.13 in 54 mm
EZ-575		5 in 127 mm	9.00 in 229 mm	6 in 152 mm	1.50 in 38 mm	15.00 in 381 mm	8 in 203 mm	3.50 in 89 mm
EZ-675		6 in 152 mm	10.75 in 273 mm	8 in 203 mm	1.36 in 35 mm	18.75 in 475 mm	10 in 254 mm	4.38 in 111 mm
MP60 & AIR		6 in 152 mm	12.00 in 305 mm	8 in 203 mm	2.00 in 51 mm	20.00 in 508 mm	10 in 254 mm	5.00 in 127 mm

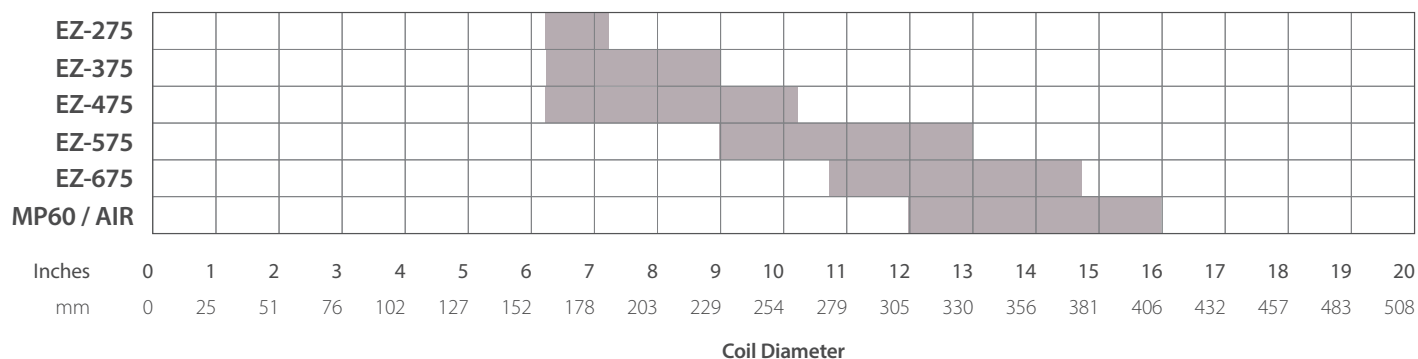
Payout Tube Selection by Min/Max Coil Sizes and Mandrel Type









REELEX Payout Tube Size Guide - 6 Inch Mandrels

Tube		Overall Tube Length	Minimum Coil Diameter	Coil Wall Thickness at Minimum	Coil Wall Thickness at Maximum	
					Maximum Coil Diameter	Coil Wall Thickness at Maximum
EZ-275		2 in 51 mm	6.25 in 159 mm	0.13 in 3 mm	7.25 in 184 mm	0.63 in 16 mm
EZ-375		3 in 76 mm	6.25 in 159 mm	0.13 in 3 mm	9.00 in 229 mm	2.13 in 54 mm
EZ-475		4 in 101 mm	6.25 in 159 mm	0.13 in 3 mm	10.25 in 260 mm	2.13 in 54 mm
EZ-575		5 in 127 mm	9.00 in 229 mm	1.5 in 38 mm	13.00 in 330 mm	3.5 in 89 mm
EZ-675		6 in 152 mm	10.75 in 273 mm	2.38 in 60 mm	14.75 in 375 mm	4.38 in 111 mm
MP60 & AIR		6 in 152 mm	12.00 in 305 mm	3.0 in 76 mm	16.00 in 406 mm	5.0 in 127 mm

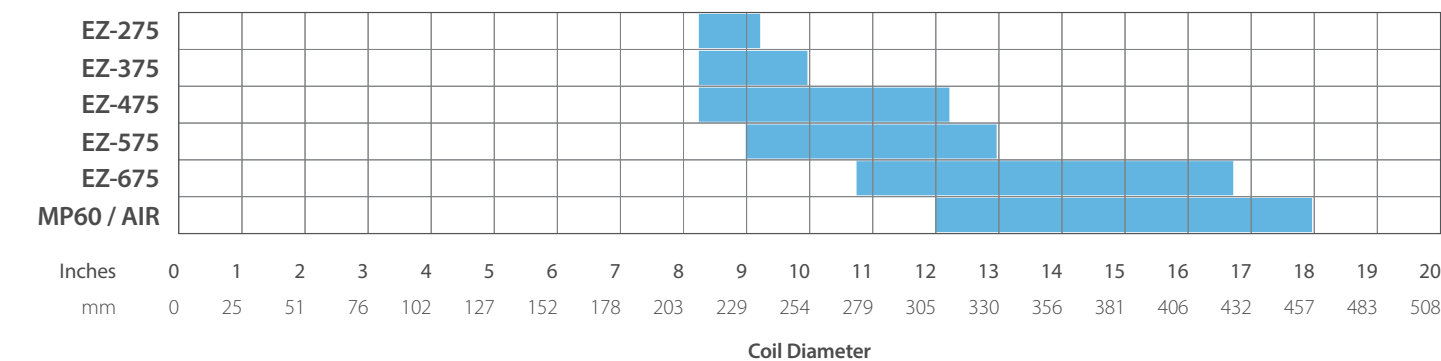
Payout Tube Selection by Coil Size Range - 6 Inch Mandrel








REELEX Payout Tube Size Guide - 8 Inch Mandrels

Tube	Coil Size Range Min Max	Overall Tube Length	Minimum Coil Diameter	Coil Wall Thickness at Minimum	Maximum Coil Diameter	Coil Wall Thickness at Maximum
EZ-275		2 in 51 mm	8.25 in 210 mm	0.13 in 3 mm	9.25 in 235 mm	0.63 in 16 mm
EZ-375		3 in 76 mm	8.25 in 210 mm	0.13 in 3 mm	11.00 in 279 mm	1.50 in 38 mm
EZ-475		4 in 101 mm	8.25 in 210 mm	0.13 in 3 mm	12.25 in 311 mm	2.13 in 54 mm
EZ-575		5 in 127 mm	9.00 in 229 mm	1.50 in 38 mm	15.00 in 381 mm	3.50 in 89 mm
EZ-675		6 in 152 mm	10.75 in 273 mm	1.36 in 35 mm	18.75 in 475 mm	4.38 in 111 mm
MP60 & AIR		6 in 152 mm	12.00 in 305 mm	2.00 in 51 mm	20.00 in 508 mm	5.00 in 127 mm

Payout Tube Selection by Coil Size Range - 8 Inch Mandrel



REELEX Payout Tube Size Guide - 10 Inch Mandrels

Tube		Overall Tube Length	Minimum Coil Diameter	Coil Wall Thickness at Minimum	Maximum Coil Diameter	Coil Wall Thickness at Maximum
EZ-275		2 in 51 mm	10.25 in 260 mm	0.13 in 3 mm	11.25 in 286 mm	0.63 in 16 mm
EZ-375		3 in 76 mm	10.25 in 260 mm	0.13 in 3 mm	13.00 in 330 mm	2.13 in 54 mm
EZ-475		4 in 101 mm	10.25 in 260 mm	0.13 in 3 mm	14.25 in 362 mm	2.13 in 54 mm
EZ-575		5 in 127 mm	10.25 in 260 mm	0.13 in 3 mm	17.00 in 432 mm	3.50 in 89 mm
EZ-675		6 in 152 mm	11.25 in 286 mm	0.38 in 10 mm	19.25 in 489 mm	4.38 in 111 mm
MP60 & AIR		6 in 152 mm	12.00 in 305 mm	1.00 in 25 mm	20.00 in 508 mm	5.00 in 127 mm

Payout Tube Selection by Coil Size Range - 10 Inch Mandrel

